


Datenblatt

Datasheet – Scheda tecnica – Fiche technique

Elektro Wandheizkessel 6 – 24,3 kW

Electric wall-mounted boiler with pump – Caldaia elettrica murale con pompa –
Chaudière murale électrique avec pompe

ERHHK6MTV – ERHHK24MTV

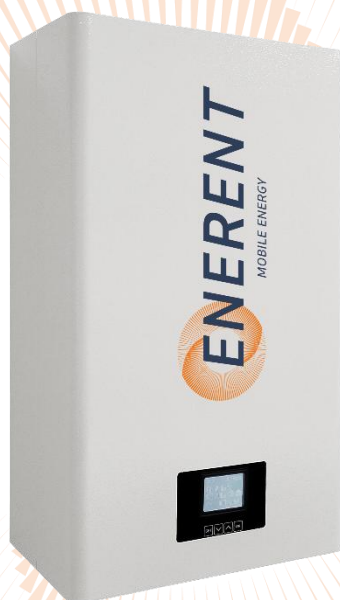

Technische Daten / Technical Data / Données techniques / Dati tecnici

Typ	ERHHK6MTV	ERHHK9MTV	ERHHK12MTV	ERHHK18MTV	ERHHK24MTV
Abmessungen (B x T x H) /Dimensions (W x D x H) Dimensioni (L x P x A) / Dimensions (L x P x H)	710 x 430 x 230 mm				
Gewicht/ Weight / Peso / Poids	25 kg				
Heizleistung / Heating output / Potenza termica / Puissance de chauffage	3 – 6 kW	3 – 9 kW	6 – 12 kW	6 – 18 kW	8 – 24 kW
Spannungsversorgung / Power supply / Alimentazione elettrica / Alimentation	400 V, 50 Hz, 9 A	400 V, 50 Hz, 14 A	400 V, 50 Hz, 18 A	400 V, 50 Hz, 27 A	400 V, 50 Hz, 35 A
Anschlüsse / Connections / Conessioni / Relations	G ¾“ unten am Gerät				
Notwendige bauseitige Absicherung, Anschlusskabel dreiphasiger Anschluss / Necessary on-site protection, connection cable three-phase connection / Protezione necessaria in loco, cavo di collegamento collegamento trifase / Protection nécessaire sur site, câble de raccordement connexion triphasée	3 x 16 A 5 x 2,5 mm ²	3 x 20 A 5 x 2,5 mm ²	3 x 32 A 5 x 4 mm ²	3 x 40 A	5 x 6 mm ²
Notwendige bauseitige Absicherung, Anschlusskabel einphasiger Anschluss / Necessary on-site protection, connection cable single-phase connection / Protezione necessaria in loco, cavo di collegamento monofase / Protection nécessaire sur site, câble de raccordement connexion monophasée	1 x 32 A 3 x 4 mm ²	1 x 50 A 3 x 6 mm ²	Nicht möglich / Not possible / Non è possibile / Pas possible	Nicht möglich / Not possible / Non è possibile / Pas possible	Nicht möglich / Not possible / Non è possibile / Pas possible
Ausdehnungsgefäß / expansion tank / vaso di espansione / vase d'expansion	8 l				
Pumpe / pump / pompa / pompe	Hocheffizienzpumpe / High efficiency pump / Pompa ad alta efficienza / Pompe à haut rendement				
Empfohlener Betriebsdruck / operating pressure / pressione operative / pression de service	Min. 0,3 bar – max. 2,6 bar				
Sicherheitsventil / Safety valve / Valvola di sicurezza / Soupape de sécurité	Intern integriert / Internally integrated / Integrato internamente / Intégré en interne				
Schutzart / protection class / classe di protezione / classe de protection	IP 44				
Leistungsstufen / Performance levels / Livelli di prestazione / Niveaux de performances	3 x 2 kW	6 x 1,5 kW	6 x 2 kW	9 x 2 kW	9 x 2,7 kW
Mind. Leistung / min. Performance / minimo Prestazione / Min. Performance	2 kW	1,5 kW	2 kW	2 kW	2,7 kW
Max. Leistung / Max. power / Massimo. Energia / Max. pouvoir	6 kW	9 kW	12 kW	18 kW	24,3 kW
Temperaturbereich / Temperature range / Intervallo di temperatura / Plage de température	10 – 80 °C				
Übertemperaturschutz / Over-temperature protection / Protezione da sovratemperatura / Protection contre la surchauffe	95 °C				
Technische Änderungen vorbehalten / Subject to technical changes / Con riserva di modifiche tecniche / Sous réserve de modifications techniques					

Kontakt / contact / contatto

Deutschland / Germany /
Germania / Allemagne
www.enerent.de



Österreich / Austria /
Austria / Austria
www.enerent.at



Schweiz / Switzerland /
Svizzera / Suisse
www.enerent.ch



International / internazionale /
internationaux
www.enerent.com

